



Valvola regolatrice di flusso compensata tre vie con valvola limitatrice di pressione
 3 ways, pressure compensated flow regulator valve with relief valve

mod. RF-A-VLP10


Corpo in alluminio
 Aluminium body

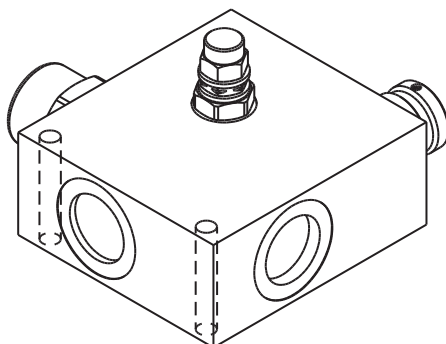

Modello Type	P, C, T	Portata max Max flow		Pressione max Max pressure
		Ingresso Inflow P	Regolata Regulated C	
RF-A-VLP10-38	3/8" GAS	60 l/min 16 gpm	35 l/min 9 gpm	270 bar 3900 psi
RF-A-VLP10-12	1/2" GAS	100 l/min 26 gpm	70 l/min 18 gpm	270 bar 3900 psi
RF-A-VLP10-34	3/4" GAS	150 l/min 40 gpm	90 l/min 24 gpm	270 bar 3900 psi
RF-A-VLP10-10	1" GAS	280 l/min 74 gpm	190 l/min 50 gpm	270 bar 3900 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
 Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

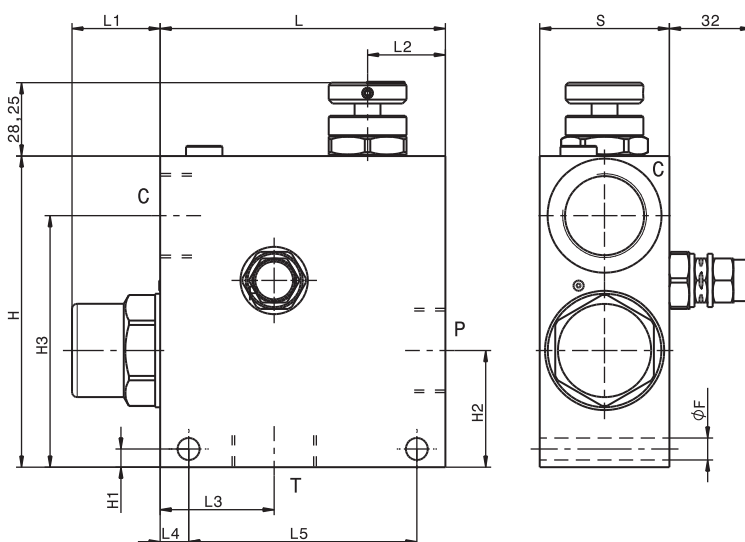

Regolazioni Adjustments		
A Volantino Handknob	B Vite esterna esagono incassato Leakproof hex socket screw	C Manopola Handknob

Modello Type	L	H	S	L1	L2	L3	L4	L5	H1	H2	H3	F
RF-A-VLP10-38	90	90	40	26	20	39	13	64	6	30	73	6.5
RF-A-VLP10-12	90	90	40	26	20	40	13	64	6	30	73	6.5
RF-A-VLP10-34	110	110	50	35	30	45	11	88	7	36	87	8.5
RF-A-VLP10-10	110	120	50	35	30	44	11	88	7	45	97	8.5

Valvola limitatrice di pressione Relief valve	Taratura Setting	180 bar
	Campo di regolazione Setting Range	40 ÷ 250 bar

Sigla di ordinazione / Ordering code

RF-A-VLP10-34	B
Modello Type	Codice di regolazione Adjustment code A, B, C

For flow diagram see
 CURVES OF COMPENSATION 3 WAYS VALVE (6) +
 CURVES OF COMPENSATION 3 WAYS VALVE (7)

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, CBF reserves the right to introduce modifications without notice.