



Valvola regolatrice di flusso compensata, due vie, regolazione a leva
 2 ways, pressure compensated flow regulator valve, lever operated

mod. RF-A2-L

Versione con corpo in alluminio o in acciaio
 Aluminium or steel body version

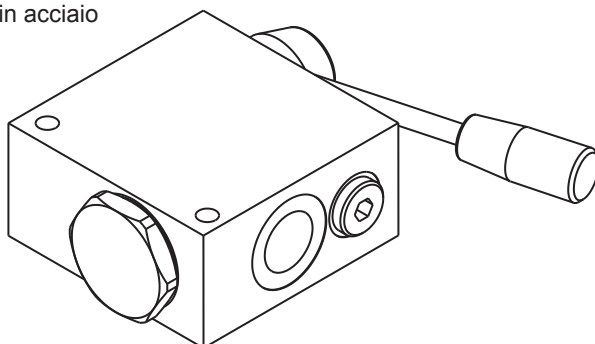

Modello Type	P, C	Portata max Max flow	Pressione max Max pressure
RF-A2-38-L	3/8" GAS	See table	270 bar 3900 psi
RF-A2-12-L	1/2" GAS	See table	270 bar 3900 psi
RF-A2-34-L	3/4" GAS	90 l/min 24 gpm	270 bar 3900 psi
RF-A2-10-L	1" GAS	190 l/min 50 gpm	270 bar 3900 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
 Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ


Modello Type	L	L1	L2	L3	L4	H	H1	H2	F	S
RF-A2-38-L	80	64	30	30	20	85	8	39	6.5	40
RF-A2-12-L	80	64	30	30	20	85	8	39	6.5	40
RF-A2-34-L	100	84	36	39	25	100	10	44	8.5	50
RF-A2-10-L	100	84	40	35	25	100	10	43	8.5	50

Campi di portata (Solo per 3/8" e G1/2")
 Flow range (Only for G3/8" and G1/2")

01	0 ÷ 10 l/min 0 ÷ 2.7 gpm
02	0 ÷ 20 l/min 0 ÷ 5.3 gpm
03	0 ÷ 40 l/min 0 ÷ 10.5 gpm

Sigla di ordinazione / Ordering code

RF-A2-38-L	01	-
Modello Type	Campo di portata Adjustment flow range 01, 02, 03	- Alluminio / Aluminium A Acciaio / Steel

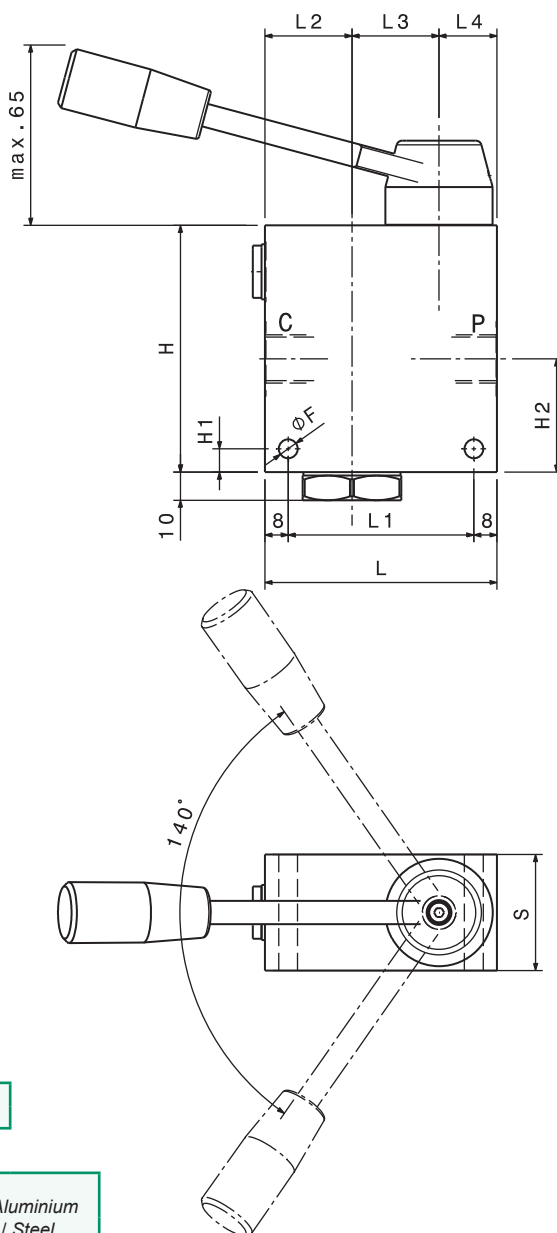

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, CBF reserves the right to introduce modifications without notice.