





Regolatore di flusso 2 vie compensato, regolazione fissa, a cartuccia
Flow regulator, 2 ways, pressure compensated, fixed setting – cartridge type

mod. RF2F-22-C

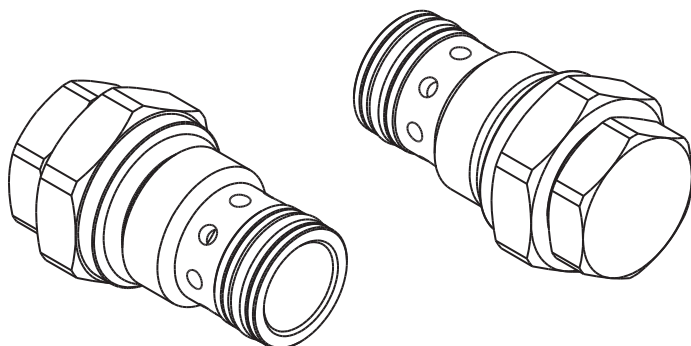


Portata massima <i>Max flow</i>	36 l/min 9.5 gpm
Pressione massima <i>Max pressure</i>	350 bar 5000 psi
Coppia di serraggio <i>Installation torque</i>	45 ÷ 50 Nm 33 ÷ 37 lb ft

Foro calibrato (mm) <i>Orifice diameter (mm)</i>	Portata regolata <i>Regulated flow</i>
1	2 l/min 0,5 gpm
1.5	4 l/min 1,1 gpm
2	7 l/min 1,8 gpm
2.5	10 l/min 2,6 gpm
3	15 l/min 4,0 gpm
3.5	21 l/min 5,5 gpm
4	28 l/min 7,4 gpm
4.5	36 l/min 9,5 gpm

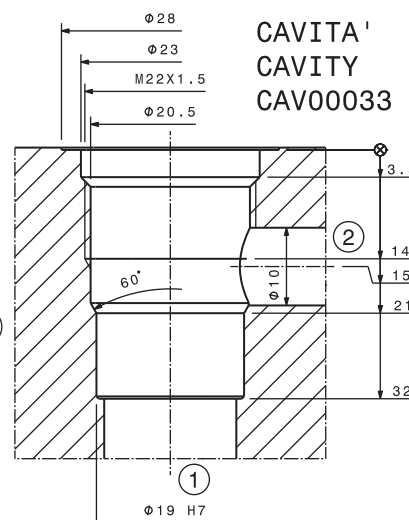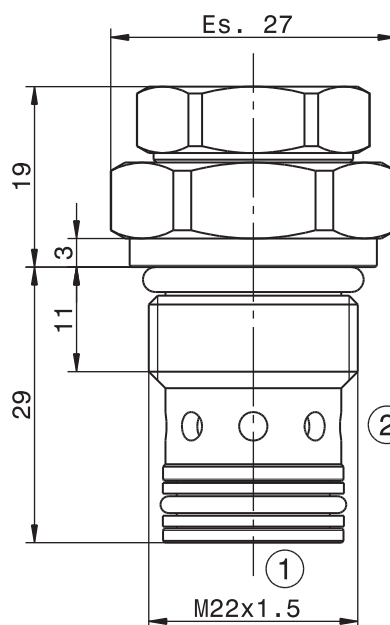

Dati e tarature ottenuti usando olio a 30 cSt a 50°C.
Viscosità raccomandate 10 ÷ 420 cSt. Temperature di lavoro
-20÷+90 °C.
Filtrazione assoluta 25 µ.
Performances and calibrations are carried out by using hydraulic oil
with 30
cSt viscosity at 50°C (122 F). Recommended viscosity 10 ÷ 420 cSt,
working temperature -20÷+90 °C (-4 F÷194 F). Absolute filtration
25 µ.

Sigla di ordinazione / Ordering code

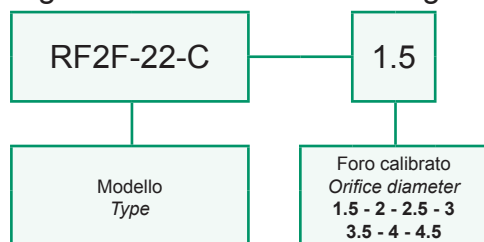

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.