



Valvola regolatrice di flusso compensata tre vie con comando elettrico
3 ways, pressure compensated flow regulator valve with electric drive


mod. RFP-A-CE

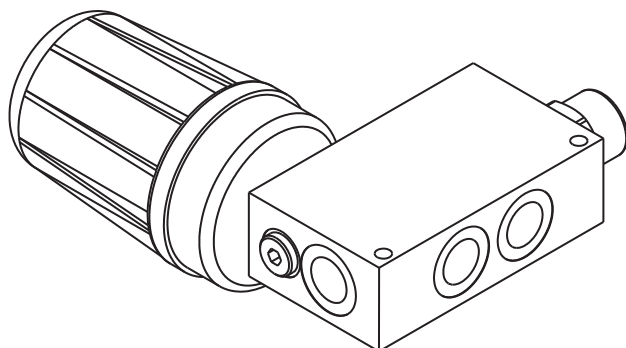

Modello Type	P, B, C	Portata max Max flow		Pressione max Max pressure
		Ingresso Inflow P	Regolata Regulated C	
RFP-A-38-CE	3/8" GAS	60 l/min 16 gpm	35 l/min 9 gpm	270 bar 3900 psi
RFP-A-12-CE	1/2" GAS	100 l/min 26 gpm	65 l/min 17 gpm	270 bar 3900 psi
RFP-A-34-CE	3/4" GAS	150 l/min 40 gpm	90 l/min 24 gpm	270 bar 3900 psi
RFP-A-10-CE	1" GAS	380 l/min 100 gpm	190 l/min 50 gpm	270 bar 3900 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperatura di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

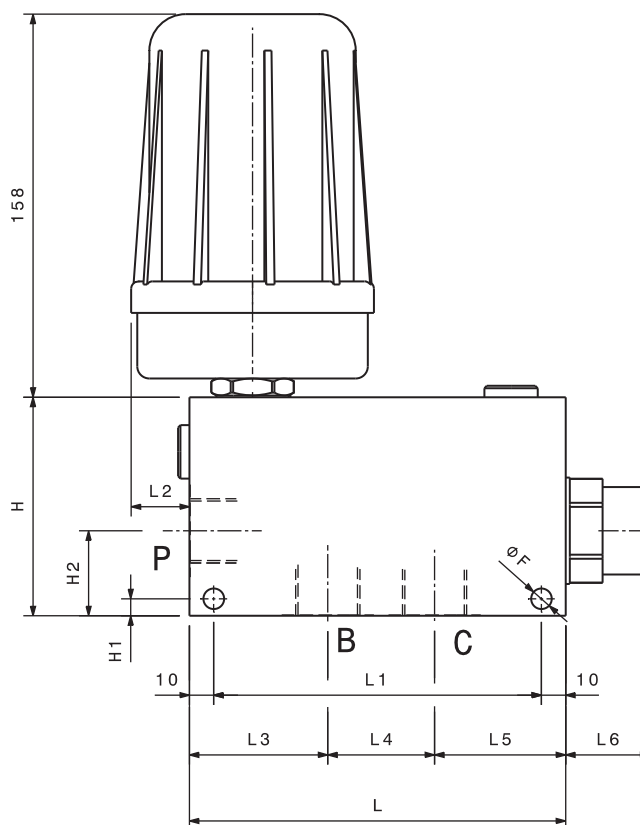

Modello Type	L	L1	L2	L3	L4	L5	L6	H	H1	H2	F	S
RFP-A-38-CE	130	110	28	48	37	45	38	70	6	28	6.5	40
RFP-A-12-CE	130	110	28	48	37	45	38	70	6	28	6.5	40
RFP-A-34-CE	155	135	24	57	44	54	35	90	7	35	8.5	50
RFP-A-10-CE	150	130	22	46	56	48	55	130	10	65	8.5	60

Sigla di ordinazione / Ordering code

RFP-A-34-CE	12
Modello Type	Tensione / Voltage 12 12 VDC 24 24 VDC

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.