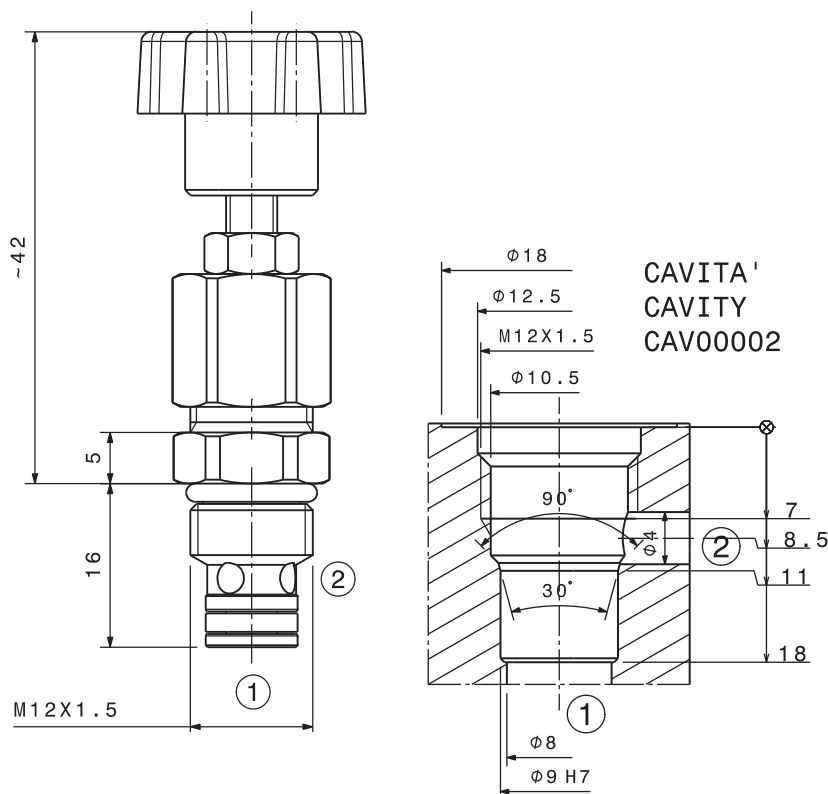


The image contains two technical line drawings of hose end fittings. The drawing on the left shows a standard hose end fitting, which consists of a star-shaped handle, a hexagonal body, and a threaded end. The drawing on the right shows a quick disconnect fitting, which has a similar star-shaped handle and hexagonal body, but the threaded end is replaced by a quick disconnect mechanism with a locking collar and a pin.

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C <i>Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C</i>	
Viscosità consigliate <i>Recommended viscosity</i>	10 ÷ 420 cSt
Temperature di lavoro <i>Working temperature</i>	-20 ÷ +90 °C
Filtrazione assoluta <i>Absolute filtration</i>	25 µ

Modello
Type

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.