

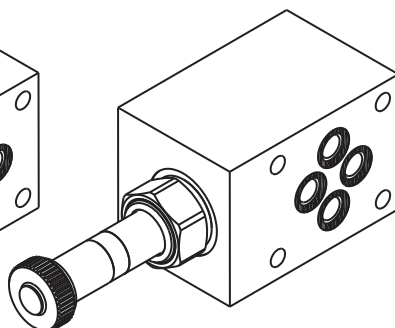


Valvola elettrica modulare 2/2 circuito A – luce 6
Solenoid valve 2/2, sandwich mounting, circuit A – NG6
mod. EV08-2X-S-F-C3-A-TC

Corpo in alluminio
Aluminium body


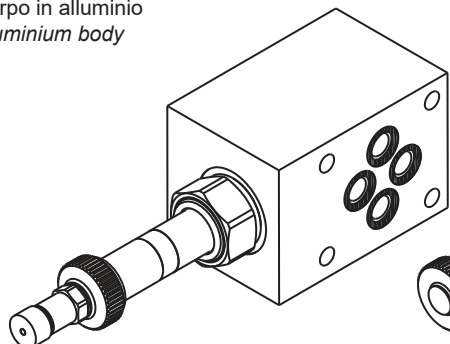


Portata massima Max flow	40 l/min 10.5 gpm
Pressione massima Max pressure	300 bar 4300 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

Modello Type	H
EV0820 EV0822	59
EV0820M EV0822M	81
EV0821 EV0823	64
EV0821M EV0823M	84

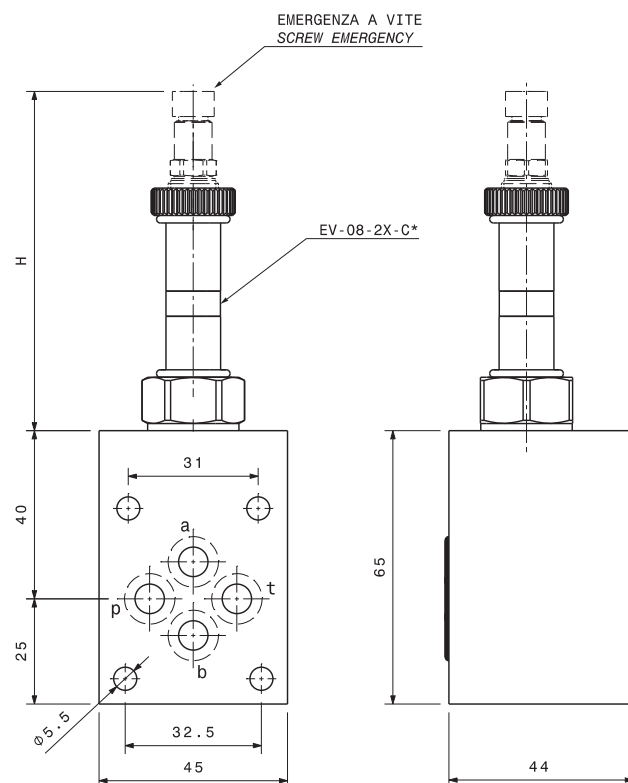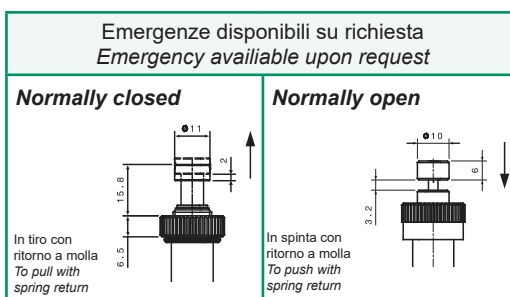

Bobina venduta separatamente mod. S1
Coil sold separately mod. S1

* schemi idraulici
* hydraulic diagrams

For flow diagram see
PRESSURE DROP SOLENOID VALVE(1)


Sigla di ordinazione / Ordering code

EV082X

S-F-C3-A-TC

Modello
Type

EV0820 EV0821
EV0822 EV0823
EV0820M EV0821M
EV0822M EV0823M

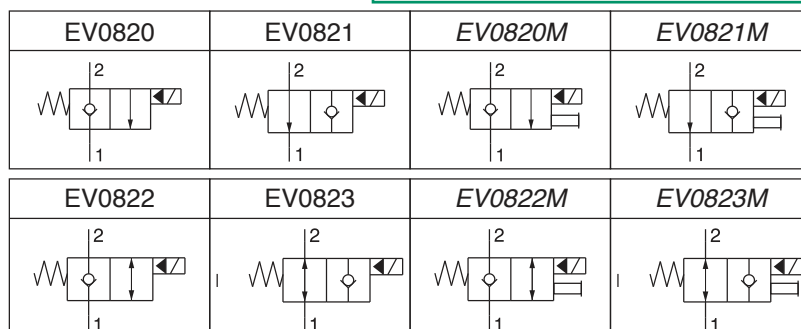

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.