



Valvola elettrica modulare 2/2 circuito A – luce 6
 Solenoid valve 2/2, sandwich mounting, circuit A – NG6
 mod. EV082X-S-F-C3-A

Corpo in alluminio
 Aluminium body

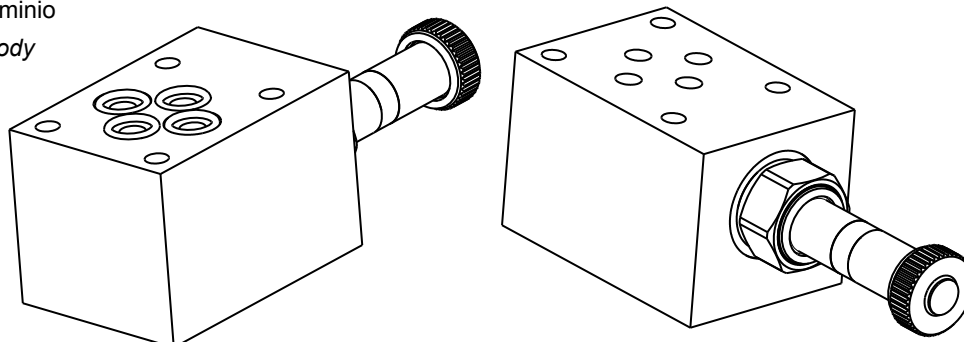


Portata massima Max flow	40 l/min 10.5 gpm
Pressione massima Max pressure	300 bar 4300 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
 Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

Bobina venduta separatamente mod. S1
 Coil sold separately mod. S1

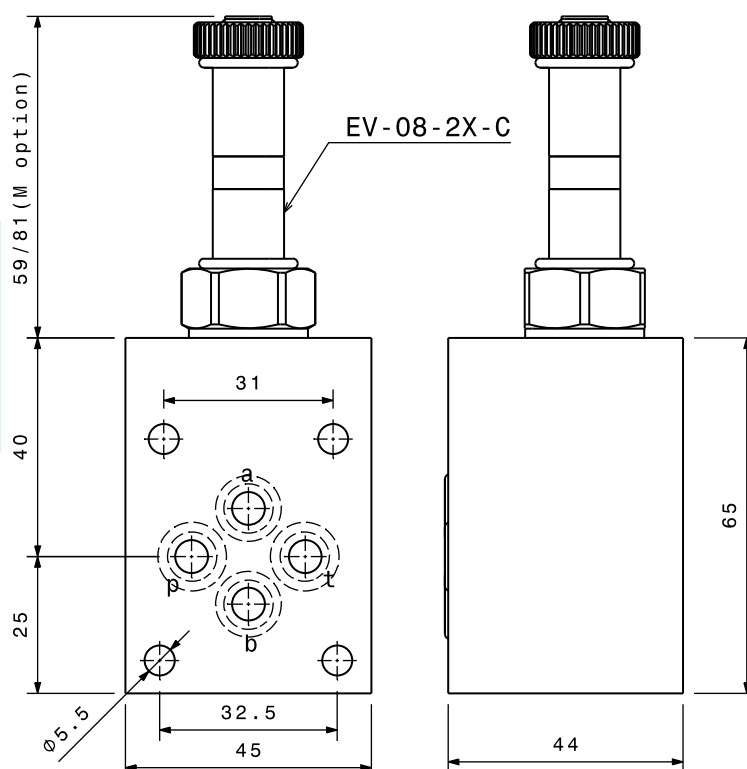

* schemi idraulici
 * hydraulic diagrams

Sigla di ordinazione / Ordering code

EV082X	S-F-C3-A
Modello Type EV0820 EV0821 EV0822 EV0823 EV0820M EV0821M EV0822M EV0823M	

EV0820	EV0821	EV0820M	EV0821M
EV0822	EV0823	EV0822M	EV0823M

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, CBF reserves the right to introduce modifications without notice.