


Valvola elettrica modulare 2/2 circuito B – luce 6
Solenoid valve 2/2, sandwich mounting, circuit B – NG6
mod. EV082X-S-F-C3-B

Corpo in alluminio
Aluminium body

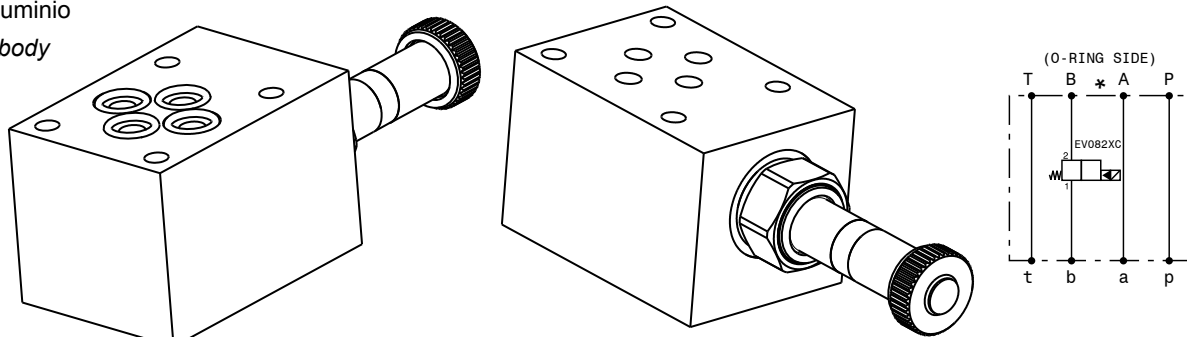


Portata massima Max flow	40 l/min 10.5 gpm
Pressione massima Max pressure	300 bar 4300 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

Bobina venduta separatamente mod. S1
Coil sold separately mod. S1

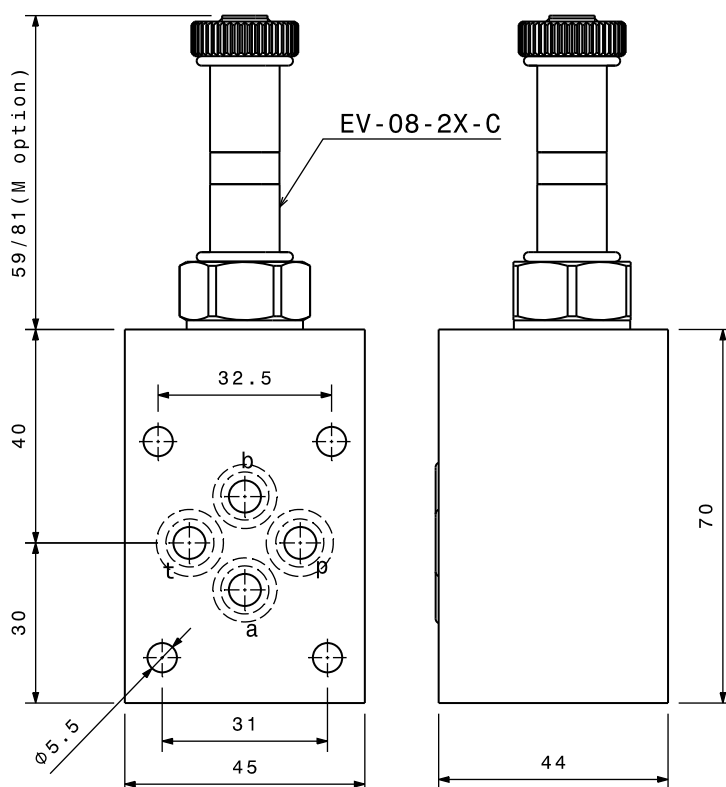

* schemi idraulici
* hydraulic diagrams

Sigla di ordinazione / Ordering code

EV082X	S-F-C3-B
Modello Type	
EV0820 EV0821	
EV0822 EV0823	
EV0820M EV0821M	
EV0822M EV0823M	

EV0820	EV0821	EV0820M	EV0821M
EV0822	EV0823	EV0822M	EV0823M

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.