



Valvola regolatrice di flusso a tre vie prioritaria modulare– luce 6
 Three ways priority flow regulator, sandwich mounting – NG6

mod. RFP50-F-C3

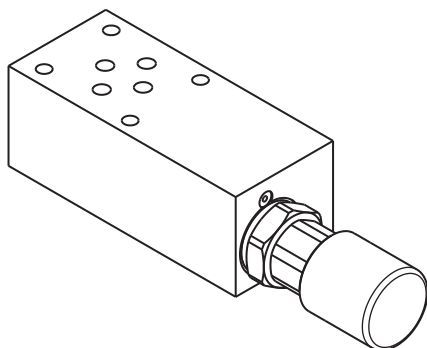


Corpo in alluminio
 Aluminium Body

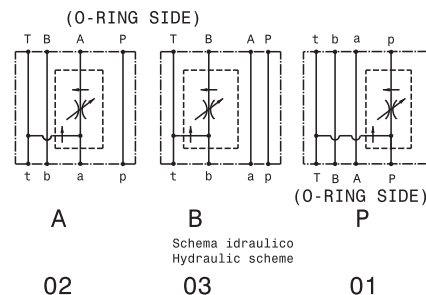

Portata massima Max flow	40 l/min 10.5 gpm
Pressione massima Max pressure	300 bar 4300 psi
Portata regolata Regulated flow	0 ÷ 25 l/min 0 ÷ 6.6 gpm

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
 Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperatura di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

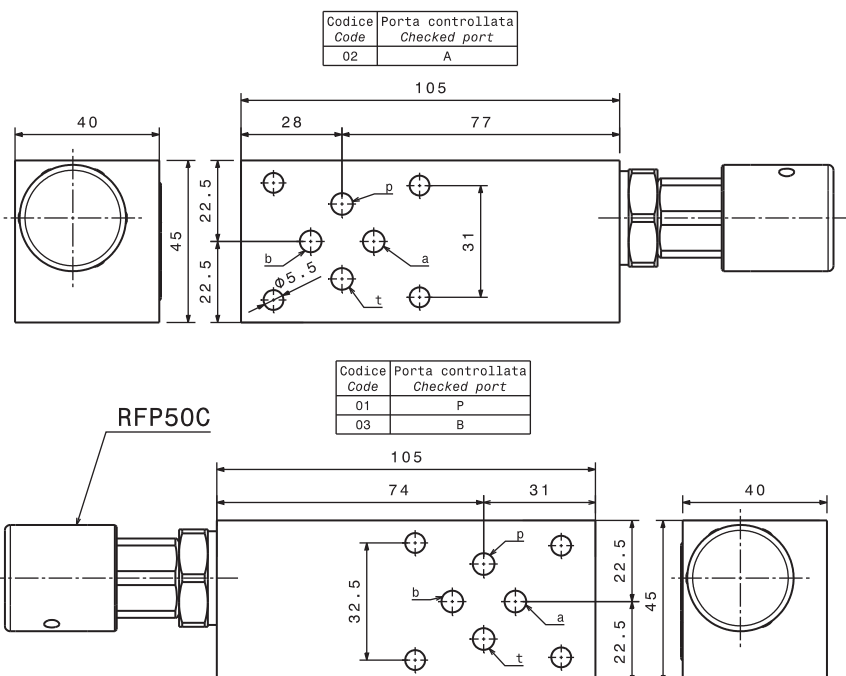

A

Manopola con vite di bloccaggio
 Handknob with locking src

B

Manopola
 Handknob

**Su richiesta
 On request**

VEI

Vite con dado
 Screw with locking src

Sigla di ordinazione / Ordering code

RFP50-F-C3	02	A
Modello Type	Porta controllata Checked port 01, 02, 03	Codice regolazione Adjustment code A, B, VEI

For flow diagram see
 CURVES OF COMPENSATION 3 WAYS VALVE(1)

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.