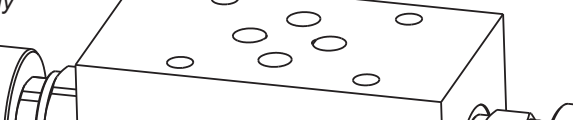
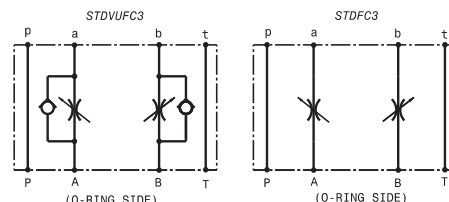





mod. STD-VU-F-C3 / STD-F-C3

in alluminio
ium body


A technical line drawing of a rectangular aluminum body. The top surface features six circular mounting holes arranged in two rows of three. On the left side, there is a threaded port with a flange. On the right side, there is another threaded port, also with a flange, which appears to have a small circular feature in the center of its face.

Regolazioni <i>Adjustments</i>	
A  Vite esterna esagono incassato <i>Leakproof hex socket screw</i>	B  Volantino <i>Handknob</i>

Viscosità consigliate <i>Recommended viscosity</i>	10 ÷ 420 cSt
Temperature di lavoro <i>Working temperature</i>	-20 ÷ +90 °C
Filtrazione assoluta <i>Absolute filtration</i>	25 µ

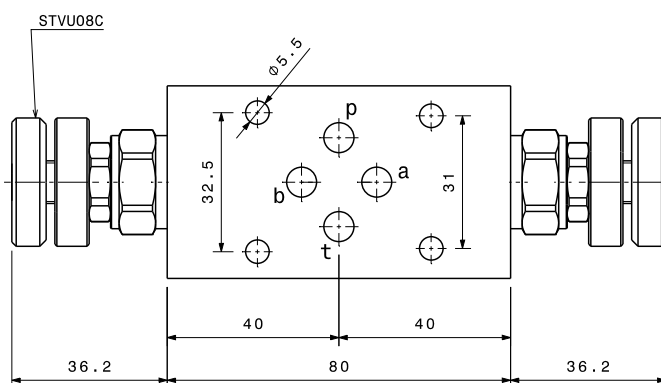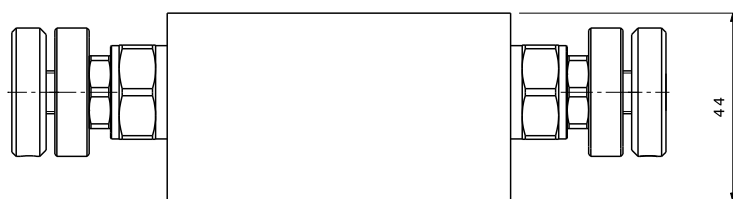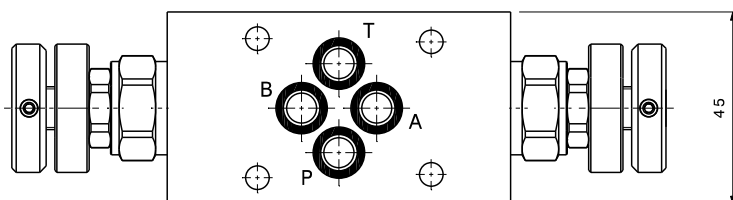

Sigla di ordinazione / Ordering code

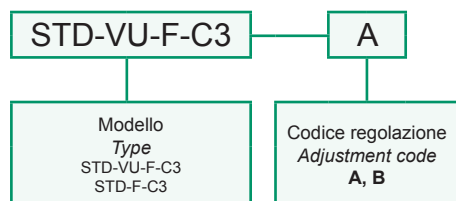

For flow diagram see
PRESSURE DROP NEEDLE VALVE (3) +
PRESSURE DROP NEEDLE VALVE (8)

Aggiornamento / Update 22-01-2016