



Base per elettrovalvole flangiabile su motori DANFOSS OMP-OMR - luce 6
Sub-plate for solenoid valves, flangeable to DANFOSS OMP-OMR motors - NG 6

mod. **BEC3-FMD-1-12**

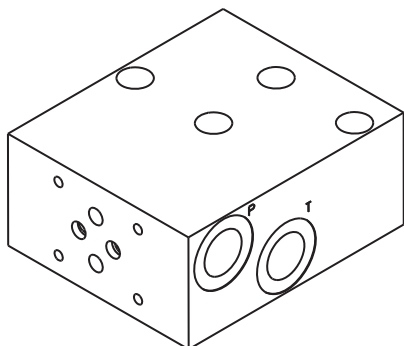




Corpo in alluminio
Aluminium body



Portata massima Max flow	40 l/min 10.5 gpm
Pressione massima Max pressure	280 bar 4060 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperatura di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

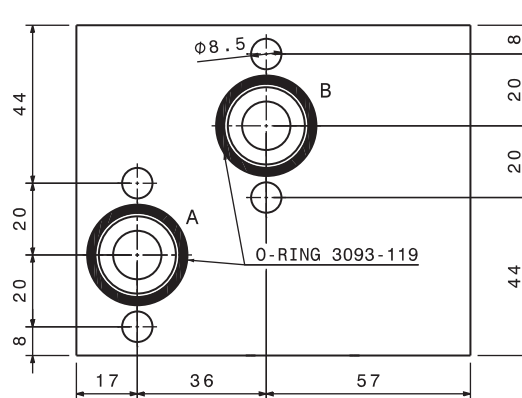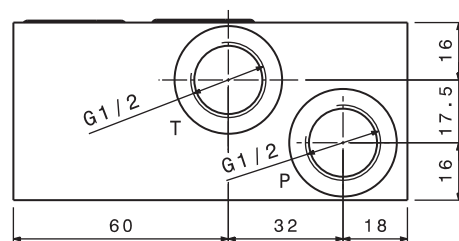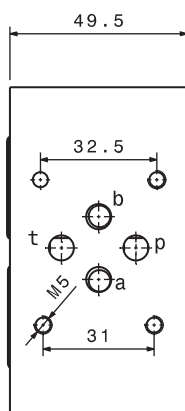

Sigla di ordinazione / Ordering code

BEC3-FMD-1-12

Modello
Type

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.