



Valvola selettoria flangiabile su motori DANFOSS OMP-OMPL-OMR
Shuttle valve, flangeable to DANFOSS OMP-OMPL-OMR motors
mod. VS-FMD-VC

Corpo in alluminio
Aluminium body




Portata massima <i>Max flow</i>	60 l/min <i>16 gpm</i>
Pressione massima <i>Max pressure</i>	270 bar <i>3900 psi</i>

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate <i>Recommended viscosity</i>	10 ÷ 420 cSt
Temperature di lavoro <i>Working temperature</i>	-20 ÷ +90 °C
Filtrazione assoluta <i>Absolute filtration</i>	25 µ

Vite cava disponibile a richiesta Nipple screw available upon request	Codice di ordinazione <i>Ordering Code</i> KITV0004
--	--

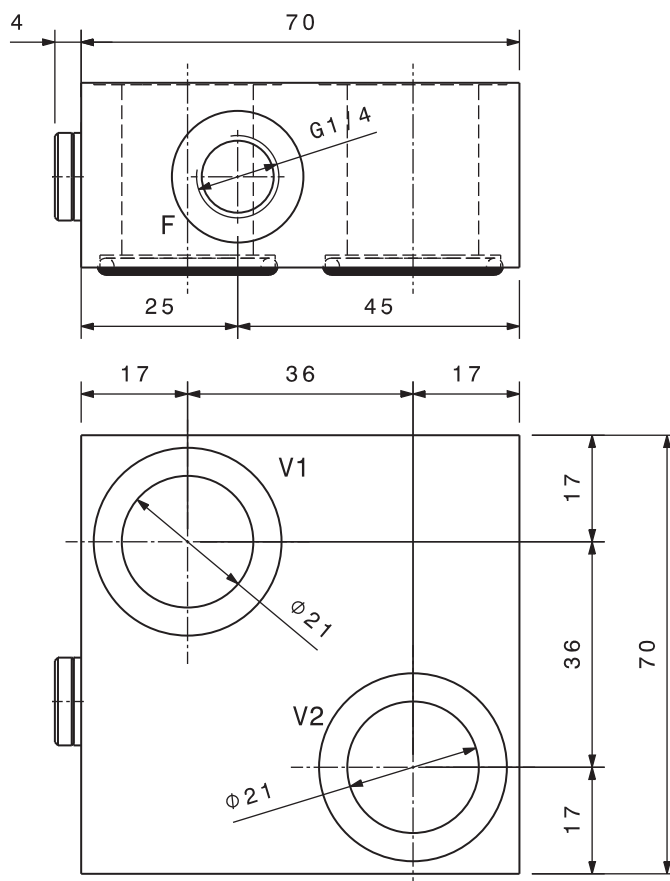

Sigla di ordinazione / Ordering code

VS-FMD-VC

Modello
Type

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.