

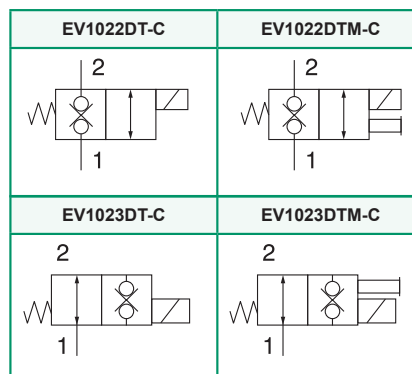
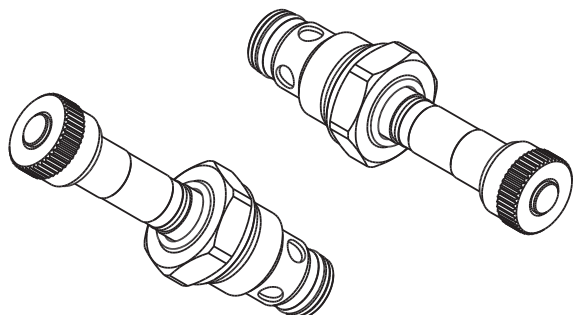


Valvola elettrica direzionale 2/2 a doppia tenuta
2/2 solenoid directional valve, bidirectional blocking

mod. EV-10-2X-DT-C

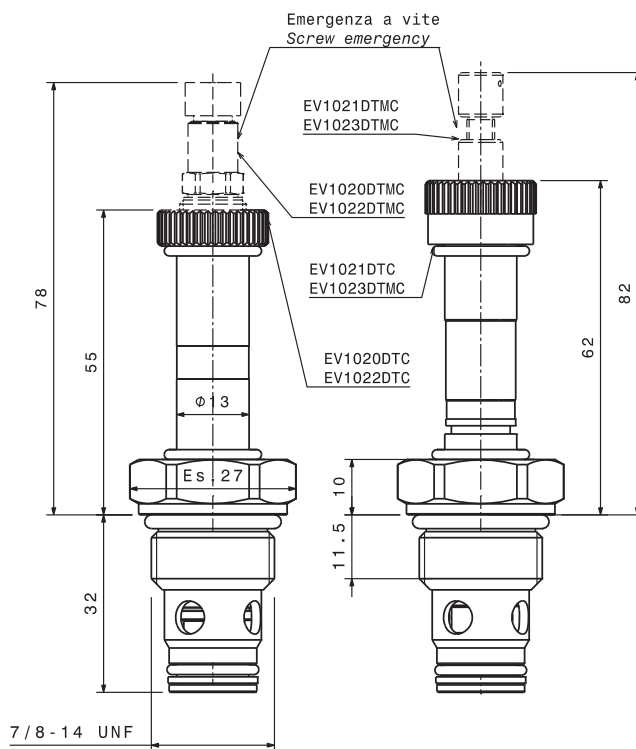

Portata massima <i>Max flow</i>	70 l/min 18.5 gpm	
Pressione massima <i>Max pressure</i>	EV-10-2*-DT-C	250 bar 3600 psi
	EV-10-2*-DT-C-Y (Su richiesta) (Upon request)	350 bar 5000 psi
Coppia di serraggio <i>Installation torque</i>	45 ÷ 50 Nm 33 ÷ 37 lbf ft	
Dati e tarature ottenuti usando olio a 30 cSt a 50°C. Viscosità raccomandate 10 ÷ 420 cSt. Temperature di lavoro -20÷+90 °C. Filtrazione assoluta 25 µ. <i>Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C (122 F). Recommended viscosity 10 ÷ 420 cSt, working temperature -20÷+90 °C (-4 F÷194 F). Absolute filtration 25 µ.</i>		

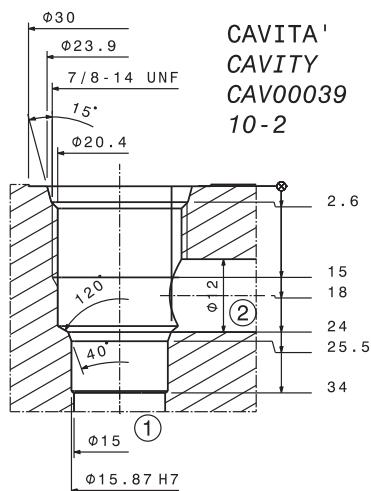


Sigla di ordinazione / Ordering code

EV1022DT	C*	- Pressione massima 250 bar Max Pressure 250 bar Y Pressione massima 350 bar Max pressure 350 bar
Modello/Type		
EV1022DT		
EV1023DT		
EV1022DTM**		
EV1023DTM**		
		* Bobina venduta separatamente mod. S1 * Coil sold separately mod. S1


For flow diagram see
PRESSURE DROP SOLENOID VALVE (3)

Emergenze disponibili su richiesta
Emergency available upon request

Normally closed



Normally open



**
M standard emergency screw type
MT pull (only for normally closed)
MS push (only for normally open)

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.