
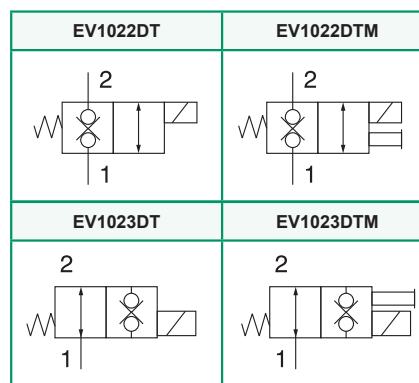



Valvola elettrica direzionale 2/2 a doppia tenuta
 2/2 solenoid directional valve, bidirectional blocking
 mod. EV-10-2X-DT

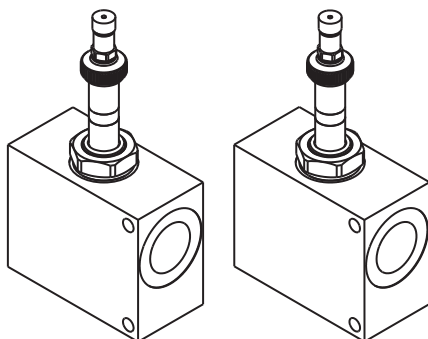

Portata massima Max flow	70 l/min 18.5 gpm	
Pressione massima Max pressure	EV-10-2*-DT-**-	250 bar 3600 psi
	EV-10-2*-DT-**-Y (Su richiesta) (Upon request)	350 bar 5000 psi

Dati e tarature ottenuti usando olio a 30 cSt a 50°C.
 Viscosità raccomandate 10 ÷ 420 cSt. Temperature di lavoro -20÷+90 °C. Filtrazione assoluta 25 µ.
 Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C (122 F). Recommended viscosity 10 ÷ 420 cSt, working temperature -20÷+90 °C (-4 F÷194 F). Absolute filtration 25 µ.

Modello Type		H1	H2
EV1020DT-12	G1/4	56	23.5
EV1020DT-34	G3/4	56	25
EV1021DT-12	G1/2	61	23.5
EV1021DT-34	G3/4	61	25
EV1022DT-12	G1/2	56	23.5
EV1022DT-34	G3/4	56	25
EV1023DT-12	G1/2	61	23.5
EV1023DT-34	G3/4	61	25
EV1020DTM-12	G1/2	78	23.5
EV1020DTM-34	G3/4	78	25
EV1021DTM-12	G1/2	81	23.5
EV1021DTM-34	G3/4	81	25
EV1022DTM-12	G1/2	78	23.5
EV1022DTM-34	G3/4	78	25
EV1023DTM-12	G1/2	81	23.5
EV1023DTM-34	G3/4	81	25

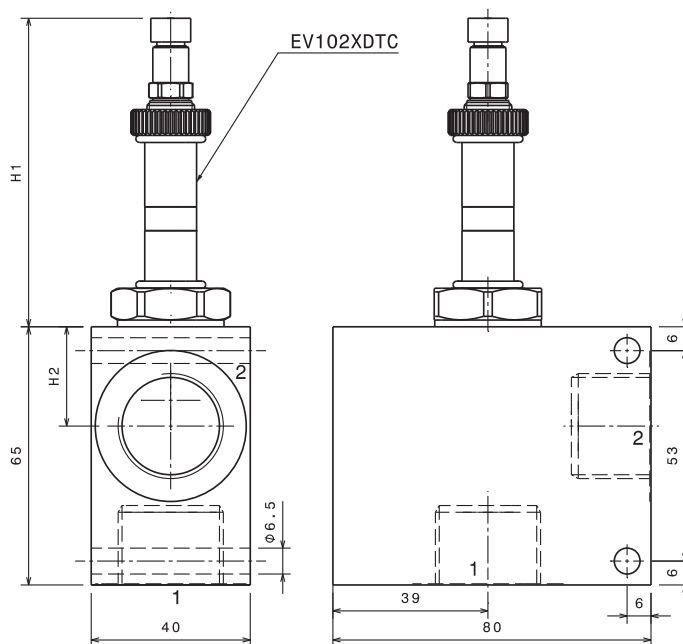

Sigla di ordinazione / Ordering code

EV1022DT	14	-	- *
Modello/Type	Filettature / Port thread	Materiale / Material	
EV1022DT EV1023DT EV1022DTM** EV1023DTM**	12 G1/2 34 G3/4	- Alluminio/Aluminium A Acciaio/Steel (su richiesta / upon request)	- Pressione massima 250 bar Max Pressure 250 bar Y Pressione massima 350 bar Max pressure 350 bar

For flow diagram see
 PRESSURE DROP SOLENOID VALVE (3)

**
 M standard emergency screw type
 MT pull (only for normally closed)
 MS push (only for normally open)

* Bobina venduta separatamente mod. S1
 * Coil sold separately mod. S1

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, CBF reserves the right to introduce modifications without notice.