

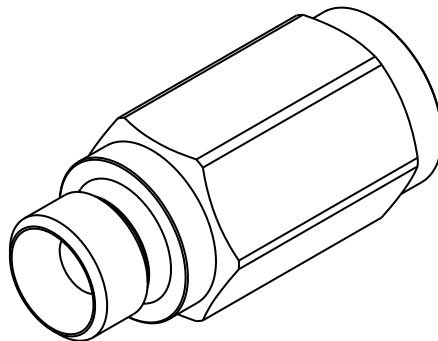


Valvola unidirezionale in linea a sfera e a cono, filettata maschio - femmina
In line check valve, ball and poppet type, male - female threaded
mod. **VUMF-SF** (sfera - ball) / **VUMF-SP** (cono - poppet)

Corpo in acciaio
Steel body

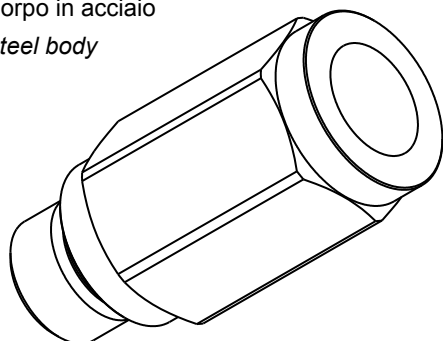


Modello Type	V1 V2	Portata massima Max Flow	Pressione massima Max pressure
VU14MF-SF	1/4" GAS	15 l/min 4 gpm	500 bar 7250 psi
VU38MF-SF	3/8" GAS	30 l/min 8 gpm	500 bar 7250 psi
VU12MF-SF	1/2" GAS	50 l/min 13 gpm	500 bar 7250 psi
VU34MF-SF	3/4" GAS	90 l/min 24 gpm	350 bar 5000 psi
VU14MF-SP	1/4" GAS	15 l/min 4 gpm	500 bar 7250 psi
VU38MF-SP	3/8" GAS	30 l/min 8 gpm	500 bar 7250 psi
VU12MF-SP	1/2" GAS	50 l/min 13 gpm	500 bar 7250 psi
VU34MF-SP	3/4" GAS	90 l/min 24 gpm	350 bar 5000 psi
VU10MF-SP	1" GAS	150 l/min 40 gpm	350 bar 5000 psi

Pressione di apertura
Cracking pressure

1 bar 14.5 psi
3 bar 43 psi
5 bar 72 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

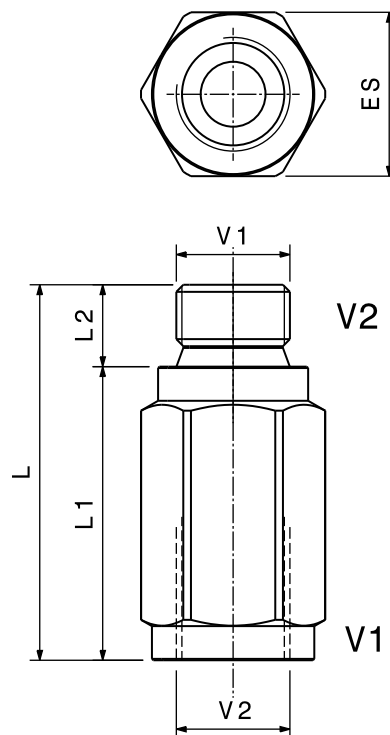

Sigla di ordinazione / Ordering code

VU38MF-SP	3 bar
Modello Type	Pressione di apertura Cracking pressure 1 - 3 - 5 bar

Dimensioni Dimensions	V1-V2	L (mm)	L1 (mm)	L2 (mm)	Es. (mm)
VU14MF-SF	1/4" GAS	50	40	10	ES. 19
VU38MF-SF	3/8" GAS	55	43	12	ES. 24
VU12MF-SF	1/2" GAS	65	51	14	ES. 27
VU34MF-SF	3/4" GAS	80	64	16	ES. 36
VU14MF-SP	1/4" GAS	50	40	10	ES. 19
VU38MF-SP	3/8" GAS	55	43	12	ES. 24
VU12MF-SP	1/2" GAS	65	51	14	ES. 27
VU34MF-SP	3/4" GAS	80	64	16	ES. 36
VU10MF-SP	1" GAS	95	76	19	ES. 41

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.