
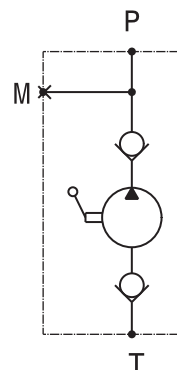


Pompa a mano
 Hand pump
 mod. BM007200



Corpo in ghisa
 Cast iron body

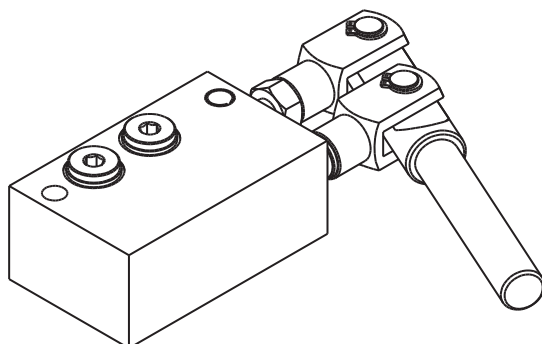

Cilindrata Displacement	5.8 cm³
Pressione massima in entrata Max inlet pressure	250 bar 3600 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
 Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperatura di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

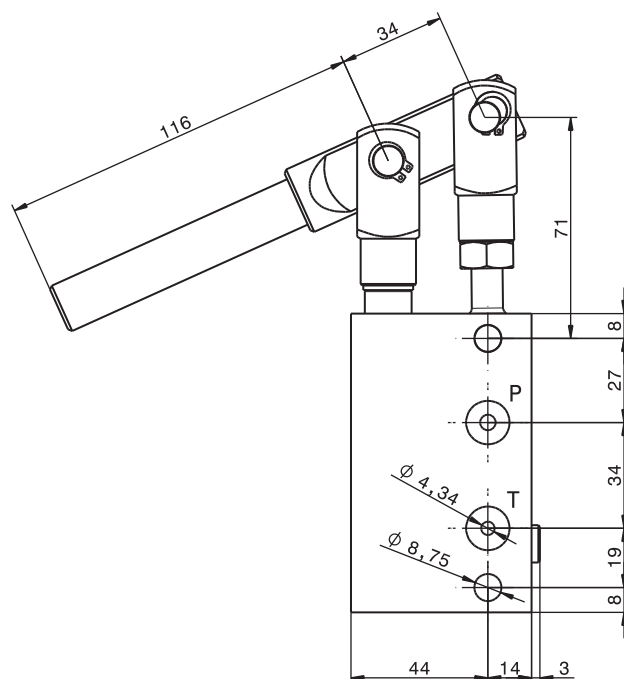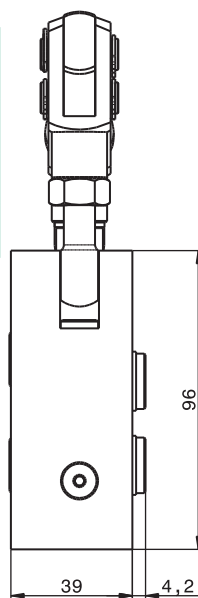

Sigla di ordinazione / Ordering code

BM007200

Modello
 Type

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.